




## WIRELESS INTERCONNECTED

## MINI SMOKE ALARM With Replaceable Battery

XS01-WR

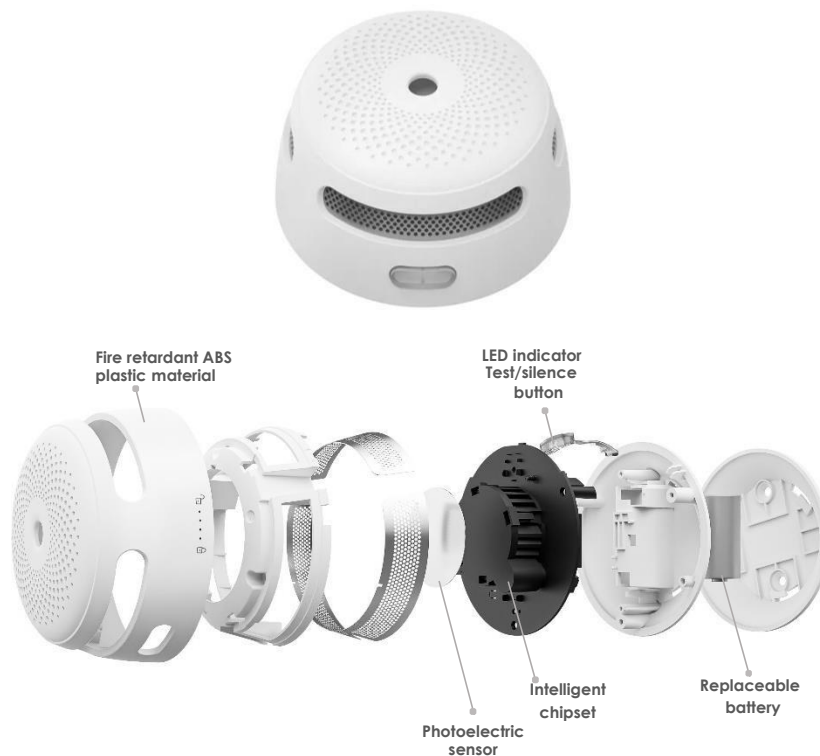

Smaller, sleeker design; quickly and accurately detects any dangerous smoke with a reduced number of false alarms

### FEATURES

- Up to 24 alarms can be wirelessly interconnected
- Sold in a pack of 2 – both units in the multi-pack are already interconnected with each other
- High capacity 5-year replaceable battery
- Certified by TÜV Rheinland, global leader in independent inspection services, to meet European Standard EN 14604 for smoke detectors
- High performance STMicroelectronics microcontroller
- When battery level is low, the red LED flashes once with 1 beep every 60 seconds
- Fire retardant ABS plastic material
- Simple 2-step installation
- Mounting hardware included
- 5-Year Warranty

### TECHNICAL SPECIFICATIONS

Power Source	Replaceable 3 V CR123A lithium battery
Sensor Type	Photoelectric
Safety Standards	EN 14604:2005+AC:2008
Coverage Area	20-40 m <sup>2</sup>
Best Operating Temperature	40-100 °F (4.4-37.8 °C)
Operating Relative Humidity	≤ 85% RH (non-condensing)
Alarm Loudness	≥85 dB at 10 ft (3 m)
Silence Duration	≤ 9 minutes
Operating Life	10 years
RF	868 MHz
Transmission Range	Over 250m in open air
Dimensions	3.0 x 3.0 x 1.9 in (78 48 mm)
Weight	0.2 lb (91 g)

\*Features and specifications subject to change without notice

